



National MM58274CV

20-Pin PLCC-to-16-Pin DIP Pkg Converter

FEATURES


- Pb-free RoHS/WEEE-compliant
- A cost-effective means of upgrading to a PLCC package type Clock Chip without changing your PCB layout.

GENERAL SPECIFICATIONS

- BOARD MATERIAL: 0.062 thick FR-4 or IS410 per IPC 4101C/26 with 1-oz. Cu traces, both sides
- PADS: finished with ENIG (Immersion Au over Electroless Ni)
- PINS: 1/2-hard Brass 360 per UNS C36000, ASTM B16/B16M
- PIN PLATING: 10 μ [0.25 μ] min. Au per MIL-G-45204 over 100 μ [2.54 μ] Ni per SAE AMS-QQ-N-290
- OPERATING TEMPERATURE: 221°F [105°C] max.

MOUNTING CONSIDERATIONS

- SUGGESTED PCB HOLE SIZE: 0.028 $\pm$ 0.003 [0.71 $\pm$ 0.08] dia.

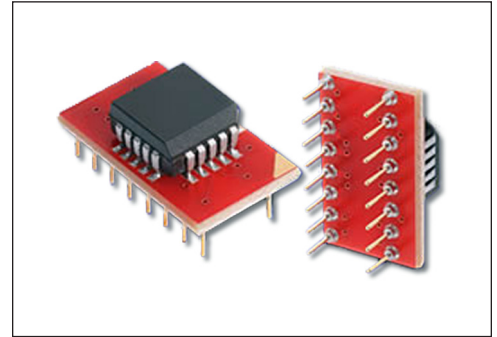

CUSTOMIZATION: In addition to the standard products shown on this page, Aries specializes in custom design and production. Special materials, platings, sizes, and configurations can be furnished, depending on the quantity. **NOTE:** Aries reserves the right to change product general specifications without notice.

ALL DIMENSIONS: INCHES [MILLIMETERS]

ALL TOLERANCES: $\pm$ 0.005 [0.13] UNLESS OTHERWISE SPECIFIED




THE ABOVE SHOWS CHIP MOUNTED FOR ILLUSTRATION PURPOSES ONLY. PLEASE CONTACT ARIES CUSTOMER SERVICE IF YOU WOULD LIKE TO SUPPLY THE CHIP OR HAVE ARIES SUPPLY AND MOUNT IT.

CONSULT FACTORY FOR OTHER SIZES AND CONFIGURATIONS


ORDERING INFORMATION

16-307349-11-RC-P

Optional Panelized Version

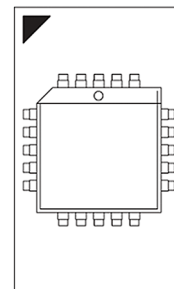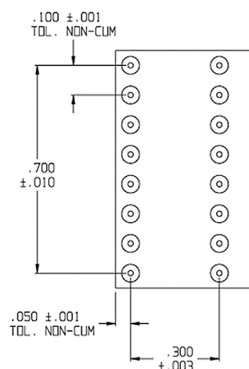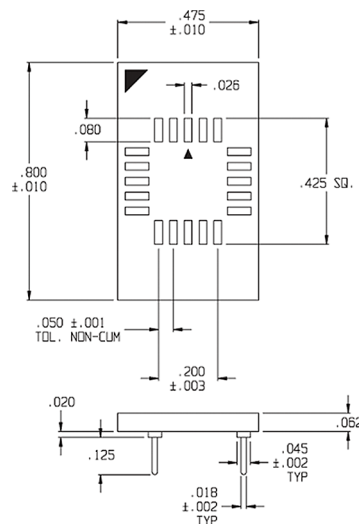

PLCC CHIP IS
MM58274CV



20 PLCC	TO	16-Pin DIP
Pin		Pin
1	➤	1
2	➤	2
3	➤	3
4	➤	N/C
5	➤	N/C
6	➤	4
7	➤	5
8	➤	N/C
9	➤	6
10	➤	7
11	➤	8
12	➤	9
13	➤	10
14	➤	11
15	➤	12
16	➤	N/C
17	➤	13
18	➤	14
19	➤	15
20	➤	16



ARIES
ELECTRONICS, INC.

Bristol, PA 19007-6810 USA
TEL (215) 781-9956 • FAX (215) 781-9845
WWW.ARIESELEC.COM • INFO@ARIESELEC.COM



18101RC
Rev. AA

PRINTOUTS OF THIS DOCUMENT MAY BE OUT OF DATE AND SHOULD BE CONSIDERED UNCONTROLLED