

**HIGH VOLTAGE MEDIUM
CURRENT DRIVER ARRAYS**

DESCRIPTION

The SG2800 series integrates eight NPN Darlington pairs with internal suppression diodes to drive lamps, relays, and solenoids in many military, aerospace, and industrial applications that require severe environments. All units feature open collector outputs with greater than 50V breakdown voltages combined with 500mA current carrying capabilities. Five different input configurations provide optimized designs for interfacing with DTL, TTL, PMOS, or CMOS drive signals. These devices are designed to operate from -55°C to 125°C ambient temperature in a 18-pin dual in-line ceramic (J) package and 20-pin leadless chip carrier (LCC).


FEATURES

- Eight NPN Darlington pairs
- Collector currents to 600mA
- Output voltages from 50V to 95V
- Internal clamping diodes for inductive loads
- DTL, TTL, PMOS, or CMOS compatible inputs
- Hermetic ceramic package

HIGH RELIABILITY FEATURES

- ◆ Available to MIL-STD-883 and DESC SMD
- ◆ MIL-M38510/14106BVA - JAN2801J
- ◆ MIL-M38510/14107BVA - JAN2802J
- ◆ MIL-M38510/14108BVA - JAN2803J
- ◆ MIL-M38510/14109BVA - JAN2804J
- ◆ MIL-M38510/14110BVA - JAN2805J
- ◆ Radiation data available
- ◆ SG level "S" processing available

PARTIAL SCHEMATICS

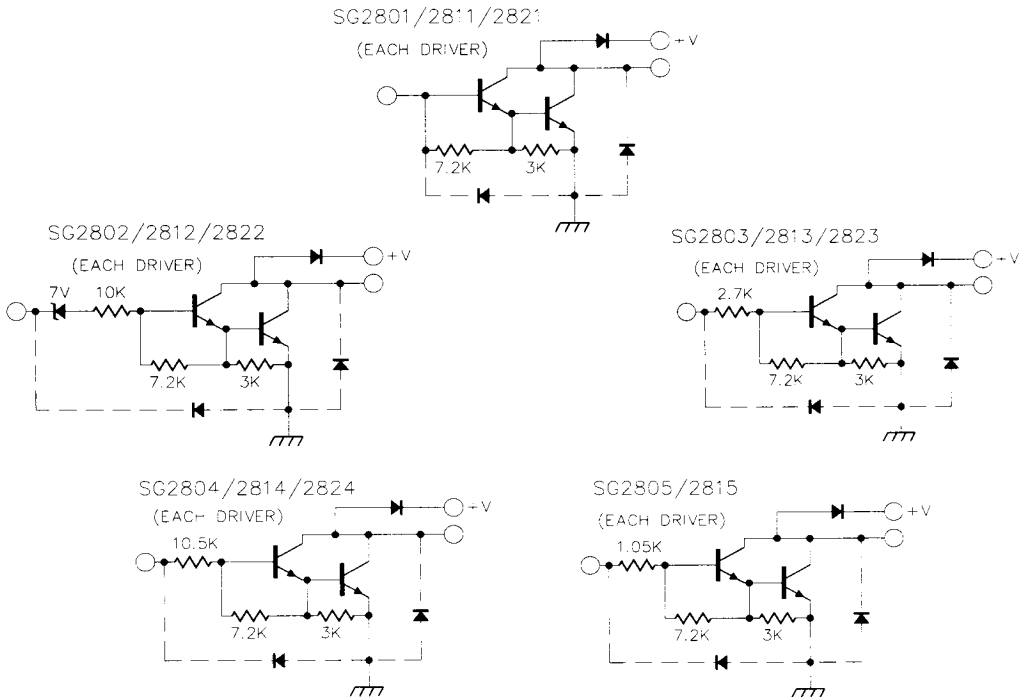


ABSOLUTE MAXIMUM RATINGS (Note 1)


Output Voltage, V_{CE} (SG2800, 2810 series)	50V	Continuous Collector Current, I_C (SG2800, 2820)	500mA
(SG2820 series)	95V	(SG2810)	600mA
Input Voltage, V_{IN} (SG2802,3,4 series)	30V	Operating Junction Temperature Hermetic (J, L Packages)	150°C
(SG2805 series)	15V	Storage Temperature Range	-65°C to 150°C
Continuous Input Current, I_{IN}	25mA	Lead Temperature (Soldering 10 sec.)	300°C

Note 1. Values beyond which damage may occur.

THERMAL DERATING CURVES

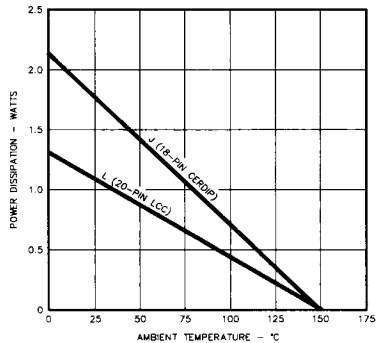

MAXIMUM POWER DISSIPATION vs AMBIENT TEMPERATURE

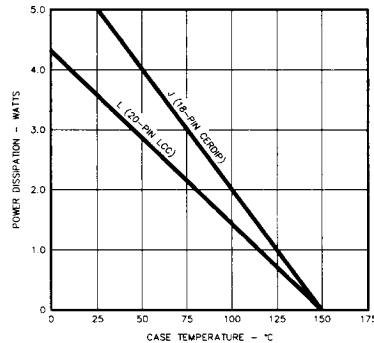

MAXIMUM POWER DISSIPATION vs CASE TEMPERATURE

RECOMMENDED OPERATING CONDITIONS (Note 2)

Output Voltage, V_{CE} SG2800, SG2820 series	50V	Peak Collector Current, I_C SG2800, SG2820 series	350mA
SG2810 series	95V	SG2810 series	500mA
		Operating Ambient Temperature Range	-55°C to 125°C

Note 2. Range over which the device is functional.

SELECTION GUIDE

Device	V_{CE} Max	I_C Max	Logic Inputs
SG2801	50V	500mA	General Purpose PMOS, CMOS
SG2802	50V	500mA	14V-25V PMOS
SG2803	50V	500mA	5V TTL, CMOS
SG2804	50V	500mA	6V-15V CMOS, PMOS
SG2805	50V	500mA	High Output TTL
SG2811	50V	600mA	General Purpose PMOS, CMOS
SG2812	50V	600mA	14V-25V PMOS

Device	V_{CE} Max	I_C Max	Logic Inputs
SG2813	50V	600mA	5V TTL, CMOS
SG2814	50V	600mA	6V-15V CMOS, PMOS
SG2815	50V	600mA	High Output TTL
SG2821	95V	500mA	General Purpose PMOS, CMOS
SG2822	95V	500mA	14V-25V PMOS
SG2823	95V	500mA	5V TTL, CMOS
SG2824	95V	500mA	6V-15V CMOS, PMOS

ELECTRICAL SPECIFICATIONS

(Unless otherwise specified, these specifications apply over the operating ambient temperatures of $-55^{\circ}\text{C} \leq T_A \leq 125^{\circ}\text{C}$. Low duty cycle pulse testing techniques are used which maintains junction and case temperatures equal to the ambient temperature.)

SG2801 thru SG2805

Parameter	Applicable Devices	Temp.	Test Conditions	Limits			Units	
				Min.	Typ.	Max.		
Output Leakage Current (I_{CEX})	All		$V_{CE} = 50\text{V}$			100	μA	
	SG2802		$V_{CE} = 50\text{V}, V_{IN} = 6\text{V}$			500	μA	
	SG2804		$V_{CE} = 50\text{V}, V_{IN} = 1\text{V}$			500	μA	
	Collector - Emitter ($V_{CE(SAT)}$)	All	$T_A = T_{MIN}$	$I_C = 350\text{mA}, I_B = 850\mu\text{A}$	1.6	1.8	V	
			$T_A = T_{MIN}$	$I_C = 200\text{mA}, I_B = 550\mu\text{A}$	1.3	1.5	V	
			$T_A = T_{MIN}$	$I_C = 100\text{mA}, I_B = 350\mu\text{A}$	1.1	1.3	V	
			$T_A = 25^{\circ}\text{C}$	$I_C = 350\text{mA}, I_B = 500\mu\text{A}$	1.25	1.6	V	
			$T_A = 25^{\circ}\text{C}$	$I_C = 200\text{mA}, I_B = 350\mu\text{A}$	1.1	1.3	V	
			$T_A = 25^{\circ}\text{C}$	$I_C = 100\text{mA}, I_B = 250\mu\text{A}$	0.9	1.1	V	
			$T_A = T_{MAX}$	$I_C = 350\text{mA}, I_B = 500\mu\text{A}$	1.6	1.8	V	
$T_A = T_{MAX}$			$I_C = 200\text{mA}, I_B = 350\mu\text{A}$	1.3	1.5	V		
Input Current ($I_{IN(ON)}$)	SG2802		$V_{IN} = 17\text{V}$	480	850	1300	μA	
	SG2803		$V_{IN} = 3.85\text{V}$	650	930	1350	μA	
	SG2804		$V_{IN} = 5\text{V}$	240	350	500	μA	
			$V_{IN} = 12\text{V}$	650	1000	1450	μA	
	SG2805		$V_{IN} = 3\text{V}$	1180	1500	2400	μA	
	Input Voltage ($V_{IN(OFF)}$)	All	$T_A = T_{MAX}$	$I_C = 500\mu\text{A}$	25	50	μA	
		SG2802	$T_A = T_{MIN}$	$V_{CE} = 2\text{V}, I_C = 300\text{mA}$			18	V
			$T_A = T_{MAX}$	$V_{CE} = 2\text{V}, I_C = 300\text{mA}$			13	V
		SG2803	$T_A = T_{MIN}$	$V_{CE} = 2\text{V}, I_C = 200\text{mA}$			3.3	V
			$T_A = T_{MIN}$	$V_{CE} = 2\text{V}, I_C = 250\text{mA}$			3.6	V
		$T_A = T_{MIN}$	$V_{CE} = 2\text{V}, I_C = 300\text{mA}$			3.9	V	
		$T_A = T_{MIN}$	$V_{CE} = 2\text{V}, I_C = 200\text{mA}$			2.4	V	
		$T_A = T_{MAX}$	$V_{CE} = 2\text{V}, I_C = 250\text{mA}$			2.7	V	
SG2804		$T_A = T_{MAX}$	$V_{CE} = 2\text{V}, I_C = 300\text{mA}$			3.0	V	
		$T_A = T_{MIN}$	$V_{CE} = 2\text{V}, I_C = 125\text{mA}$			6.0	V	
D-C Forward Current Transfer Ratio (h_{FE})	All	$T_A = T_{MIN}$	$V_{CE} = 2\text{V}, I_C = 200\text{mA}$			8.0	V	
		$T_A = T_{MIN}$	$V_{CE} = 2\text{V}, I_C = 275\text{mA}$			10	V	
		$T_A = T_{MIN}$	$V_{CE} = 2\text{V}, I_C = 350\text{mA}$			12	V	
		$T_A = T_{MIN}$	$V_{CE} = 2\text{V}, I_C = 125\text{mA}$			5.0	V	
		$T_A = T_{MAX}$	$V_{CE} = 2\text{V}, I_C = 200\text{mA}$			6.0	V	
		$T_A = T_{MAX}$	$V_{CE} = 2\text{V}, I_C = 275\text{mA}$			7.0	V	
		$T_A = T_{MAX}$	$V_{CE} = 2\text{V}, I_C = 350\text{mA}$			8.0	V	
		SG2805	$T_A = T_{MIN}$	$V_{CE} = 2\text{V}, I_C = 350\text{mA}$			3.0	V
			$T_A = T_{MAX}$	$V_{CE} = 2\text{V}, I_C = 350\text{mA}$			2.4	V
		D-C Forward Current Transfer Ratio (h_{FE})	All	$T_A = 25^{\circ}\text{C}$	$V_{CE} = 2\text{V}, I_C = 350\text{mA}$	500		
$T_A = 25^{\circ}\text{C}$	$V_{CE} = 2\text{V}, I_C = 350\text{mA}$			1000				
Input Capacitance (C_{IN}) (Note 3)	All	$T_A = 25^{\circ}\text{C}$		15	25	pF		
Turn-On Delay (T _{PLH})	All	$T_A = 25^{\circ}\text{C}$	$0.5 E_{IN}$ to $0.5 E_{OUT}$	250	1000	ns		
Turn-Off Delay (T _{PHL})	All	$T_A = 25^{\circ}\text{C}$	$0.5 E_{IN}$ to $0.5 E_{OUT}$	250	1000	ns		
Clamp Diode Leakage Current (I_R)	All		$V_R = 50\text{V}$			50	μA	
Clamp Diode Forward Voltage (V_F)	All		$I_F = 350\text{mA}$	1.7	2.0	V		

Note 3. These parameters, although guaranteed, are not tested in production.

ELECTRICAL SPECIFICATIONS (continued)

SG2811 thru SG2815

Parameter	Applicable Devices	Temp.	Test Conditions	Limits			Units
				Min.	Typ.	Max.	
Output Leakage Current (I_{CEX})	All		$V_{CE} = 50V$			100	μA
	SG2812		$V_{CE} = 50V, V_{IN} = 6V$			500	μA
	SG2814		$V_{CE} = 50V, V_{IN} = 1V$			500	μA
Collector - Emitter ($V_{CE(SAT)}$)	All		$I_C = 500mA, I_B = 1100\mu A$		1.8	2.1	V
		$T_A = T_{MIN}$	$I_C = 350mA, I_B = 850\mu A$		1.6	1.8	V
		$T_A = T_{MIN}$	$I_C = 200mA, I_B = 550\mu A$		1.3	1.5	V
		$T_A = 25^\circ C$	$I_C = 500mA, I_B = 600\mu A$		1.7	1.9	V
		$T_A = 25^\circ C$	$I_C = 350mA, I_B = 500\mu A$		1.25	1.6	V
		$T_A = 25^\circ C$	$I_C = 200mA, I_B = 350\mu A$		1.1	1.3	V
		$T_A = T_{MAX}$	$I_C = 500mA, I_B = 600\mu A$		1.8	2.1	V
		$T_A = T_{MAX}$	$I_C = 350mA, I_B = 500\mu A$		1.6	1.8	V
		$T_A = T_{MAX}$	$I_C = 200mA, I_B = 350\mu A$		1.3	1.5	V
Input Current ($I_{IN(ON)}$)	SG2812		$V_{IN} = 17V$	480	850	1300	μA
	SG2813		$V_{IN} = 3.85V$	650	930	1350	μA
	SG2814		$V_{IN} = 5V$	240	350	500	μA
			$V_{IN} = 12V$	650	1000	1450	μA
	SG2815		$V_{IN} = 3V$	1180	1500	2400	μA
	All		$I_C = 500\mu A$	25	50		μA
Input Voltage ($V_{IN(OFF)}$)	SG2812	$T_A = T_{MIN}$	$V_{CE} = 2V, I_C = 500mA$			23.5	V
		$T_A = T_{MAX}$	$V_{CE} = 2V, I_C = 500mA$			17	V
	SG2813	$T_A = T_{MIN}$	$V_{CE} = 2V, I_C = 250mA$			3.6	V
		$T_A = T_{MIN}$	$V_{CE} = 2V, I_C = 300mA$			3.9	V
		$T_A = T_{MIN}$	$V_{CE} = 2V, I_C = 500mA$			6.0	V
		$T_A = T_{MIN}$	$V_{CE} = 2V, I_C = 250mA$			2.7	V
		$T_A = T_{MAX}$	$V_{CE} = 2V, I_C = 300mA$			3.0	V
		$T_A = T_{MAX}$	$V_{CE} = 2V, I_C = 500mA$			3.5	V
	SG2814	$T_A = T_{MAX}$	$V_{CE} = 2V, I_C = 275mA$			10	V
		$T_A = T_{MIN}$	$V_{CE} = 2V, I_C = 350mA$			12	V
		$T_A = T_{MIN}$	$V_{CE} = 2V, I_C = 500mA$			17	V
		$T_A = T_{MAX}$	$V_{CE} = 2V, I_C = 275mA$			7.0	V
		$T_A = T_{MAX}$	$V_{CE} = 2V, I_C = 350mA$			8.0	V
		$T_A = T_{MAX}$	$V_{CE} = 2V, I_C = 500mA$			9.5	V
	SG2815	$T_A = T_{MIN}$	$V_{CE} = 2V, I_C = 350mA$			3.0	V
		$T_A = T_{MIN}$	$V_{CE} = 2V, I_C = 500mA$			3.5	V
		$T_A = T_{MAX}$	$V_{CE} = 2V, I_C = 350mA$			2.4	V
		$T_A = T_{MAX}$	$V_{CE} = 2V, I_C = 500mA$			2.6	V
D-C Forward Current	SG2811		$V_{CE} = 2V, I_C = 500mA$	450			
Transfer Ratio (h_{FE})			$V_{CE} = 2V, I_C = 500mA$	900			
Input Capacitance (C_{in}) (Note 3)	All	$T_A = 25^\circ C$			15	25	pF
Turn-On Delay (TPLH)	All	$T_A = 25^\circ C$	$0.5 E_{IN}$ to $0.5 E_{OUT}$		250	1000	ns
Turn-Off Delay (TPHL)	All	$T_A = 25^\circ C$	$0.5 E_{IN}$ to $0.5 E_{OUT}$		250	1000	ns
Clamp Diode Leakage Current (I_R)	All		$V_R = 50V$			50	μA
Clamp Diode Forward Voltage (V_F)	All		$I_F = 350mA$		1.7	2.0	V
			$I_F = 500mA$			2.5	V

Note 3. These parameters, although guaranteed, are not tested in production.

ELECTRICAL SPECIFICATIONS (continued)

SG2821 thru SG2824

Parameter	Applicable Devices	Temp.	Test Conditions	Limits			Units
				Min.	Typ.	Max.	
Output Leakage Current (I_{CEX})	All SG2822 SG2824		$V_{CE} = 95V$ $V_{CE} = 95V, V_{IN} = 6V$ $V_{CE} = 95V, V_{IN} = 1V$			100 500 500	μA μA μA
Collector - Emitter ($V_{CE(SAT)}$)	All	$T_A = T_{MIN}$	$I_C = 350mA, I_B = 850\mu A$		1.6	1.8	V
		$T_A = T_{MIN}$	$I_C = 200mA, I_B = 550\mu A$		1.3	1.5	V
		$T_A = T_{MIN}$	$I_C = 100mA, I_B = 350\mu A$		1.1	1.3	V
		$T_A = 25^\circ C$	$I_C = 350mA, I_B = 500\mu A$		1.25	1.6	V
		$T_A = 25^\circ C$	$I_C = 200mA, I_B = 350\mu A$		1.1	1.3	V
		$T_A = 25^\circ C$	$I_C = 100mA, I_B = 250\mu A$		0.9	1.1	V
		$T_A = T_{MAX}$	$I_C = 350mA, I_B = 500\mu A$		1.6	1.8	V
		$T_A = T_{MAX}$	$I_C = 200mA, I_B = 350\mu A$		1.3	1.5	V
		$T_A = T_{MAX}$	$I_C = 100mA, I_B = 250\mu A$		1.1	1.3	V
		$T_A = T_{MAX}$	$I_C = 100mA, I_B = 250\mu A$		1.1	1.3	V
Input Current ($I_{IN(ON)}$)	SG2822		$V_{IN} = 17V$	480	850	1300	μA
	SG2823		$V_{IN} = 3.85V$	650	930	1350	μA
	SG2824		$V_{IN} = 5V$	240	350	500	μA
Input Voltage ($V_{IN(OFF)}$) ($I_{IN(OFF)}$)	All SG2822	$T_A = T_{MAX}$	$V_{IN} = 12V$ $I_C = 500\mu A$	650	1000	1450	μA
		$T_A = T_{MIN}$	$V_{CE} = 2V, I_C = 300mA$			18	V
		$T_A = T_{MAX}$	$V_{CE} = 2V, I_C = 300mA$			13	V
		$T_A = T_{MIN}$	$V_{CE} = 2V, I_C = 200mA$			3.3	V
		$T_A = T_{MIN}$	$V_{CE} = 2V, I_C = 250mA$			3.6	V
		$T_A = T_{MIN}$	$V_{CE} = 2V, I_C = 300mA$			3.9	V
		$T_A = T_{MAX}$	$V_{CE} = 2V, I_C = 200mA$			2.4	V
		$T_A = T_{MAX}$	$V_{CE} = 2V, I_C = 250mA$			2.7	V
		$T_A = T_{MAX}$	$V_{CE} = 2V, I_C = 300mA$			3.0	V
		$T_A = T_{MIN}$	$V_{CE} = 2V, I_C = 125mA$			6.0	V
D-C Forward Current Transfer Ratio (h_{FE})	SG2824	$T_A = T_{MIN}$	$V_{CE} = 2V, I_C = 200mA$			8.0	V
		$T_A = T_{MIN}$	$V_{CE} = 2V, I_C = 275mA$			10	V
		$T_A = T_{MIN}$	$V_{CE} = 2V, I_C = 350mA$			12	V
		$T_A = T_{MIN}$	$V_{CE} = 2V, I_C = 125mA$			5.0	V
		$T_A = T_{MAX}$	$V_{CE} = 2V, I_C = 200mA$			6.0	V
		$T_A = T_{MAX}$	$V_{CE} = 2V, I_C = 275mA$			7.0	V
		$T_A = T_{MAX}$	$V_{CE} = 2V, I_C = 350mA$			8.0	V
		$T_A = T_{MIN}$	$V_{CE} = 2V, I_C = 350mA$				
		$T_A = 25^\circ C$	$V_{CE} = 2V, I_C = 350mA$				
		$T_A = 25^\circ C$	$V_{CE} = 2V, I_C = 350mA$				
D-C Forward Current Transfer Ratio (h_{FE})	SG2821		$V_{CE} = 2V, I_C = 350mA$	500			
Input Capacitance (C_{IN}) (Note 3)	All	$T_A = 25^\circ C$			15	25	pF
Turn-On Delay (TPLH)	All	$T_A = 25^\circ C$	$0.5 E_{IN}$ to $0.5 E_{OUT}$	250	1000		ns
Turn-Off Delay (TPHL)	All	$T_A = 25^\circ C$	$0.5 E_{IN}$ to $0.5 E_{OUT}$	250	1000		ns
Clamp Diode Leakage Current (I_R)	All		$V_R = 95V$			50	μA
Clamp Diode Forward Voltage (V_F)	All		$I_F = 350mA$	1.7	2.0		V

Note 3. These parameters, although guaranteed, are not tested in production.



CHARACTERISTIC CURVES




FIGURE 1. OUTPUT CHARACTERISTICS




FIGURE 2. OUTPUT CURRENT VS. INPUT VOLTAGE

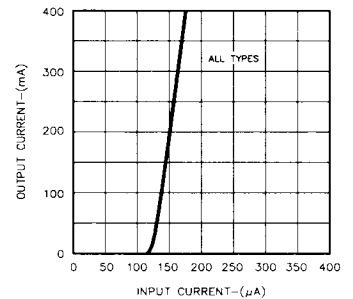


FIGURE 3. OUTPUT CURRENT VS. INPUT CURRENT




FIGURE 4. INPUT CHARACTERISTICS - SG2802




FIGURE 5. INPUT CHARACTERISTICS - SG2803

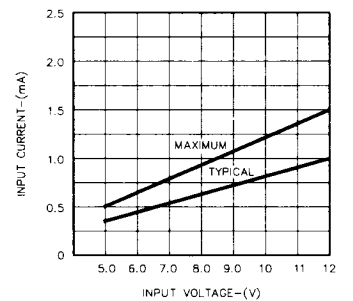


FIGURE 6. INPUT CHARACTERISTICS - SG2804




FIGURE 7. INPUT CHARACTERISTICS - SG2805

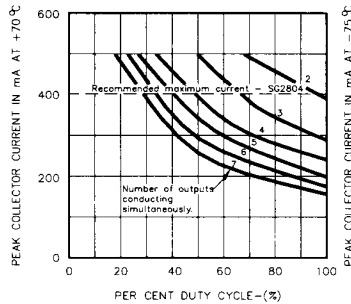


FIGURE 8. PEAK COLLECTOR CURRENT VS. DUTY CYCLE

CONNECTION DIAGRAMS & ORDERING INFORMATION (See Notes Below)

Package	Part No. (Note 3)	Ambient Temperature Range	Connection Diagram
18-PIN CERAMIC DIP J - PACKAGE	SG28XXJ/883B SG28XXJ	-55°C to 125°C -55°C to 125°C	
20-PIN CERAMIC LEADLESS CHIP CARRIER L - PACKAGE	SG28XXL/883B SG28XXL	-55°C to 125°C -55°C to 125°C	

- Note 1. Contact factory for JAN and DESC product availability.
 2. All parts are viewed from the top.
 3. See Selection Guide for specific device types.

Silicon General • 11861 Western Avenue • Garden Grove, CA 92641 • (714) 898-8121 • TWX: 910-596-1804 • FAX: (714) 893-2570