
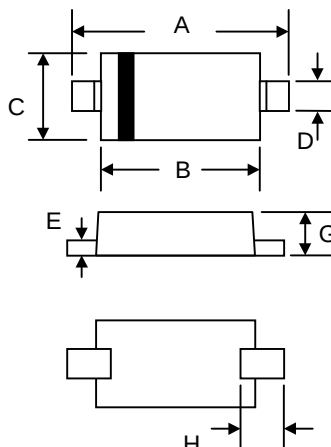


Features

- High reliability
- Low forward voltage and reverse current

Mechanical Data

- Case: SOD-323, Molded Plastic
- Terminals: Plated Leads Solderable per MIL-STD-202, Method 208
- Polarity: Cathode Band
- Weight: 0.004 grams (approx.)
- Marking: A3



SOD-323		
Dim	Min	Max
A	2.30	2.70
B	1.75	1.95
C	1.15	1.35
D	0.25	0.35
E	0.05	0.15
G	0.70	0.95
H	0.30	—
All Dimensions in mm		


Maximum Ratings $T_A = 25^\circ\text{C}$ unless otherwise specified

Parameter	Symbol	Value	Unit
Peak Reverse Voltage	V_{RM}	45	V
Reverse Voltage	V_R	10	V
Average Rectified Output Current	I_O	50	mA
Peak Forward Current	I_{FM}	150	mA
Surge Forward Current	I_{surge}	500	mA
Junction Temperature	T_J	125	$^\circ\text{C}$
Storage Temperature Range	T_S	- 55 to + 125	$^\circ\text{C}$

Characteristics at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Min.	Max.	Unit
Forward Current at $V_F = 1\text{ V}$	I_F	4	-	mA
Reverse Current at $V_R = 10\text{ V}$	I_R	-	50	μA
Reverse Voltage at $I_R = 100\text{ }\mu\text{A}$	V_R	45	-	V
Junction Capacitance at $f = 1\text{ MHz}$, $V = -1\text{ V}$	C_J	-	1	pF
Rectification efficiency at $V_i = 2\text{ V}_{rms}$, $R = 5\text{ K}\Omega$, $C = 20\text{ pF}$, $f = 40\text{ MHz}$	η	55	-	%

Forward Characteristics

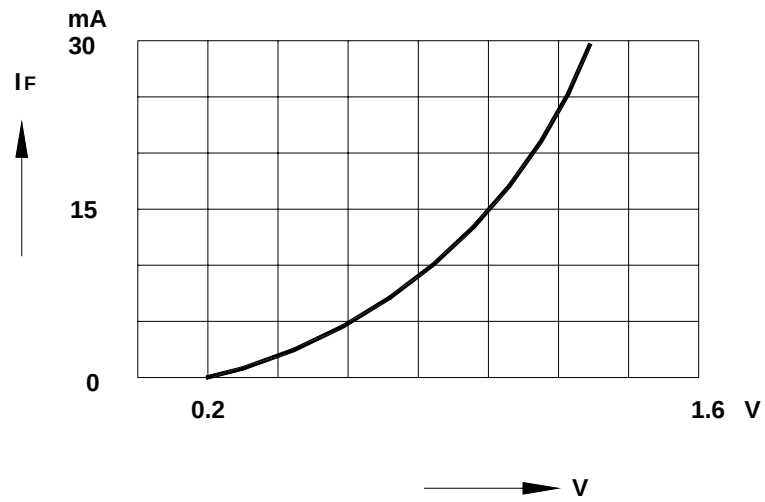

Reverse Characteristics

