

### Features


- High reverse voltage. ( $V_R = 150$  V)
- High reliability with glass seal.

### Mechanical Data

- Case: DO-35, glass case
- Polarity: Color band denotes cathode
- Weight: 0.004 ounces, 0.13 grams



### DO-35(GLASS)

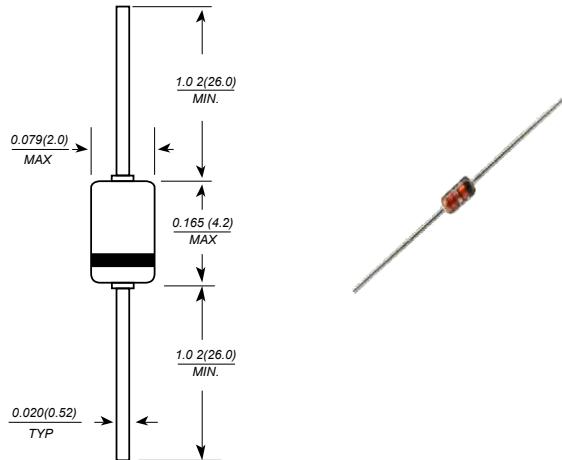

Dimensions in millimeters

### Maximum Ratings and Electrical Characteristics

@  $T_A = 25^\circ\text{C}$  unless otherwise specified

Characteristic	Symbol	Value	Unit
Peak reverse voltage	$V_{RM}$ * <sup>1</sup>	200	V
Reverse voltage	$V_R$	150	V
Average rectified current	$I_o$	200	mA
Peak forward current	$I_{FM}$	625	mA
Non-Repetitive peak forward surge current	$I_{FSM}$ * <sup>2</sup>	1	A
Power dissipation	$P_d$	400	mW
Junction temperature	$T_j$	175	°C
Storage temperature	$T_{stg}$	-65 to +175	°C

Characteristic	Symbol	Min	Typ	Max	Unit	Test Condition
Reverse current	$I_{R1}$	—	—	200	nA	$V_R = 150$ V
	$I_{R2}$	—	—	100	μA	$V_R = 200$ V
Forward voltage	$V_F$	—	—	1.0	V	$I_F = 100$ mA
Capacitance	C	—	1.5	—	pF	$V_R = 0$ V, $f = 1$ MHz
Reverse recovery time	$t_{rr}$	—	—	100	ns	$I_F = I_R = 30$ mA, $I_{rr} = 3$ mA, $R_L = 100 \Omega$

Notes: 1. Reverse voltage in excess of peak reverse voltage may deteriorate electrical characteristic.  
2. Within 1s forward surge current.



SUNMATE

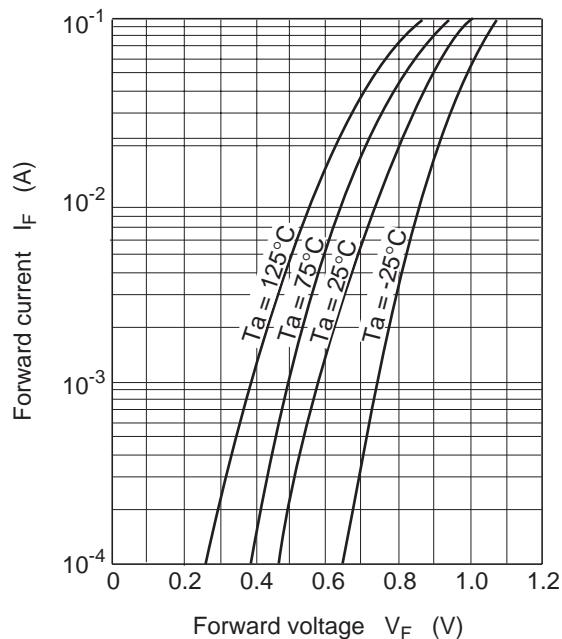


Fig.1 Forward current vs. Forward voltage

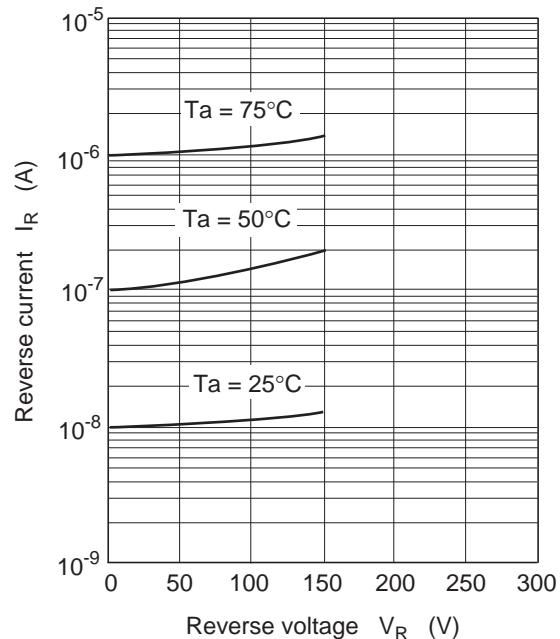


Fig.2 Reverse current vs. Reverse voltage

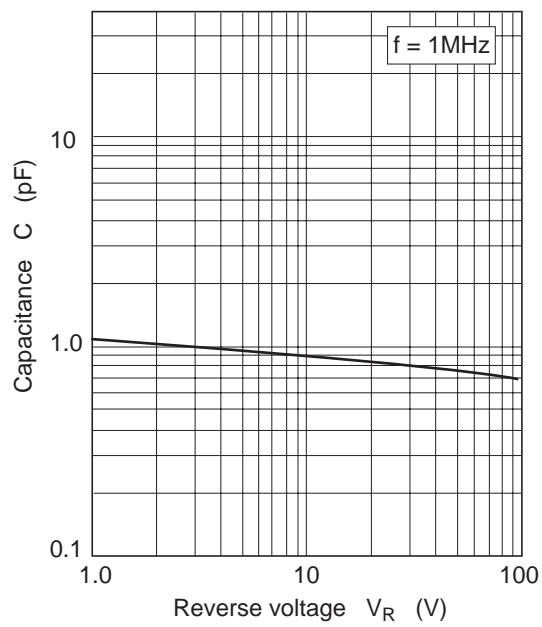


Fig.3 Capacitance vs. Reverse voltage