



VOLTAGE RANGE: 100 - 600V
CURRENT: 2.0 A

Features

- Low cost
- Low leakage
- Low forward voltage drop
- High current capability
- Easily cleaned with alcohol, Isopropanol and similar solvents

Mechanical Data

- Case : DO-15 Molded plastic
- Epoxy : UL94V-O rate flame retardant
- Lead : Axial lead solderable per MIL-STD-202, Method 208 guaranteed
- Polarity : Color band denotes cathode end
- Mounting position : Any
- Weight : 0.465 gram

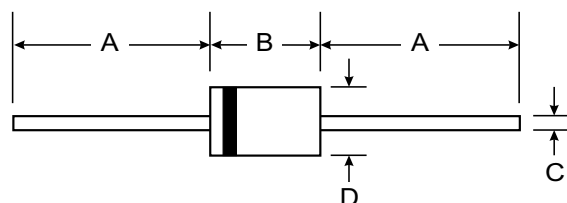

DO-15		
Dim	Min	Max
A	25.40	—
B	5.50	7.62
C	0.686	0.889
D	2.60	3.60
All Dimensions in mm		

Maximum Ratings and Electrical Characteristics T_A = 25°C unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.



Characteristic	Symbol	ER201	ER202	ER203	ER204	ER206	Unit
Maximum recurrent peak reverse voltage	V _{RRM}	100	200	300	400	600	V
Maximum RMS voltage	V _{RMS}	70	140	210	280	420	V
Maximum DC blocking voltage	V _{DC}	100	200	300	400	600	V
Maximum average forward rectified current 9.5mm lead length, @T _A =75°C	I _{F(AV)}	2.0					A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load @T _J =125°C	I _{FSM}	50.0					A
Maximum instantaneous forward voltage @ 2.0A	V _F	0.95		1.25		1.7	V
Maximum reverse current @T _A =25°C at rated DC blocking voltage @T _A =100°C	I _R			5.0 200.0			μA
Maximum reverse recovery time (Note 1)	t _{rr}			35			ns
Typical junction capacitance (Note 2)	C _J			62			pF
Typical thermal resistance (Note 3)	R _{θJA}			40			°C/W
Operating junction temperature range	T _J			- 55 ----- + 150			°C
Storage temperature range	T _{STG}			- 55 ----- + 150			°C

NOTE: 1. Measured with I_F=0.5A, I_R=1A, I_{rr}=0.25A.

2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

3. Thermal resistance junction to ambient.

FIG.1 – TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC



NOTES:1.RISE TIME = 7ns MAX.INPUT IMPEDANCE = 1MΩ.22pF.
2.RISE TIME =10ns MAX.SOURCE IMPEDANCE=50 Ω.

SET TIME BASE FOR 10/20 ns/cm

FIG.2 – TYPICAL FORWARD CHARACTERISTIC

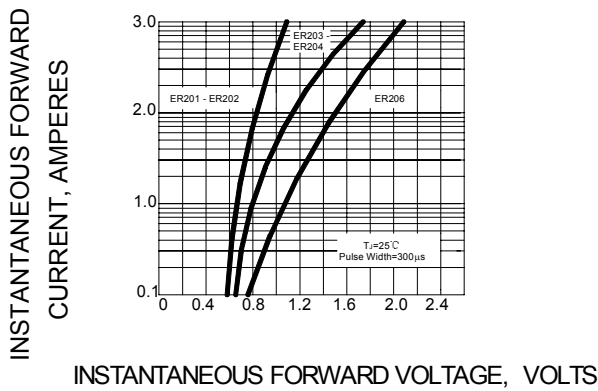


FIG.3 – FORWARD DERATING CURVE

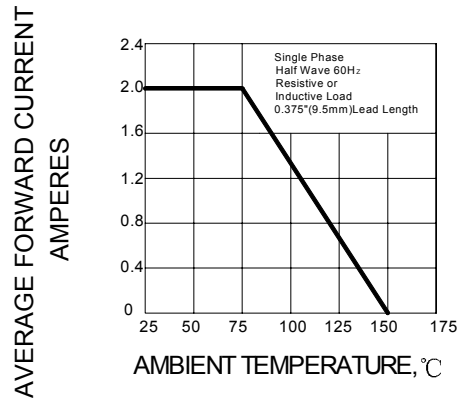


FIG.4 – TYPICAL JUNCTION CAPACITANCE

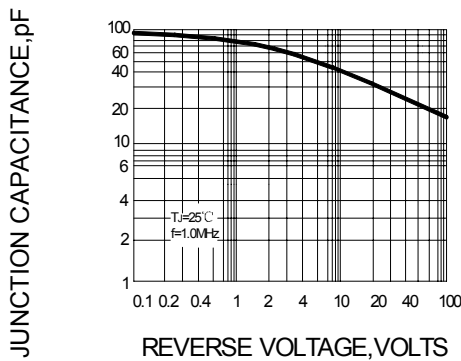


FIG.5 – PEAK FORWARD SURGE CURRENT

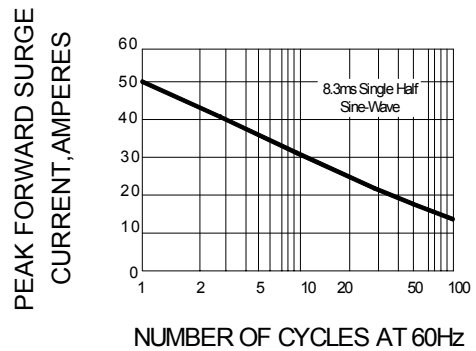


FIG.6 – TYPICAL REVERSE CHARACTERISTICS

