

**VOLTAGE RANGE: 200 - 1000V**



**CURRENT: 0.5 A**

### Features

- Low leakage
- Low forward voltage drop
- High current capability
- Easily cleaned with Freon, Alcohol, Isopropanol and similar solvents
- The plastic material carries U/L recognition 94V-0

### Mechanical Data

- Case: DO - 41
- Terminals: Plated Leads Solderable per MIL-STD-202, Method 208
- Polarity: Cathode Band
- Weight: 0.35 grams (approx.)
- Mounting Position: Any
- Marking: Type Number

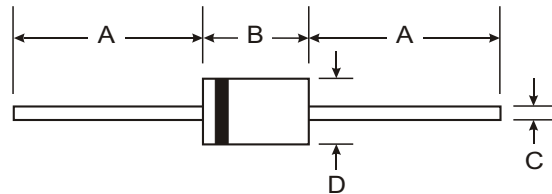

DO-41		
Dim	Min	Max
A	25.40	—
B	4.06	5.21
C	0.71	0.864
D	2.00	2.72
All Dimensions in mm		

### Maximum Ratings and Electrical Characteristics T<sub>A</sub> = 25°C unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.


Characteristic	Symbol	ERA22-02	ERA22-04	ERA22-06	ERA22-08	ERA22-10	Unit
Maximum recurrent peak reverse voltage	V <sub>RRM</sub>	200	400	600	800	1000	V
Maximum RMS voltage	V <sub>RMS</sub>	140	280	420	560	700	V
Maximum DC blocking voltage	V <sub>DC</sub>	200	400	600	800	1000	V
Maximum average forward rectified current 9.5mm lead length, @ T <sub>A</sub> =75°C	I <sub>F(AV)</sub>	0.5					A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load @ T <sub>J</sub> =125°C	I <sub>FSM</sub>	20.0					A
Maximum instantaneous forward voltage @ 0.5 A	V <sub>F</sub>	1.3					V
Maximum reverse current @ T <sub>A</sub> =25°C at rated DC blocking voltage @ T <sub>A</sub> =100°C	I <sub>R</sub>	5.0 100.0					μ A
Maximum reverse recovery time (Note1)	t <sub>rr</sub>	400					ns
Typical junction capacitance (Note2)	C <sub>J</sub>	12					pF
Typical thermal resistance (Note3)	R <sub>θJA</sub>	55					°C/W
Operating junction temperature range	T <sub>J</sub>	-55----+150					°C
Storage temperature range	T <sub>STG</sub>	-55----+150					°C

NOTE: 1. Measured with I<sub>F</sub>=0.5A, I<sub>R</sub>=1A, I<sub>rr</sub>=0.25A.

2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.


3. Thermal resistance from junction to ambient.

**FIG.1 – REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM**

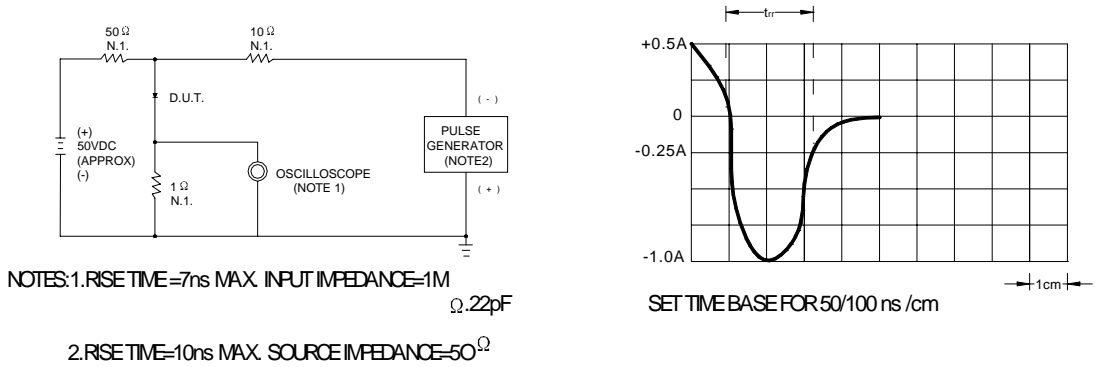

**FIG.2- PEAK FORWARD SURGE CURRENT**


PEAK FORWARD SURGE CURRENT  
AMPERES

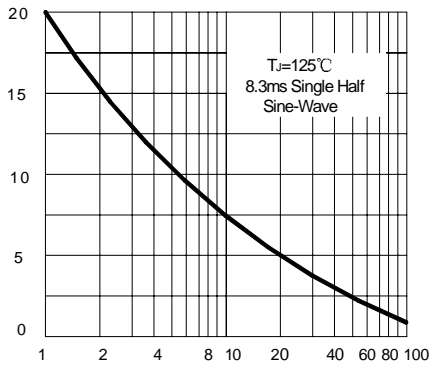

NUMBER OF CYCLES AT 60 Hz

**FIG.3- FORWARD DERATING CURVE**


AVERAGE FORWARD RECTIFIED CURF  
CURRENT, AMPERES

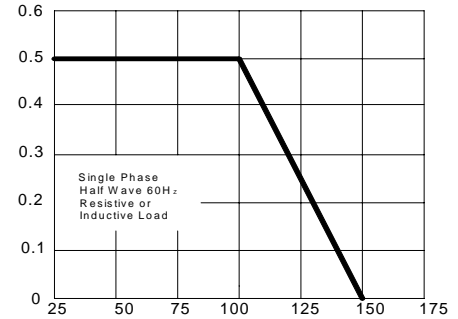

AMBIENT TEMPERATURE, °C

**FIG.4 – CURRENT DERATING CURVE**


INSTANTANEOUS FORWARD CURRENT  
AMPERES

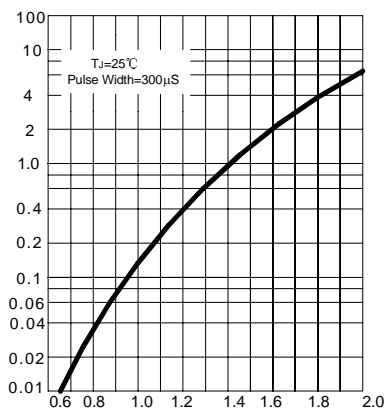

INSTANTANEOUS FORWARD VOLTAGE, VOLTS

**FIG.5—TYPICAL JUNCTION CAPACITANCE**

JUNCTION CAPACITANCE, pF

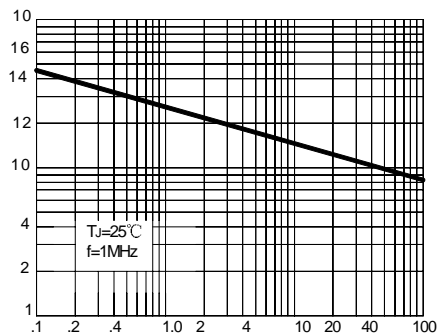

INSTANEOUS FORWARD VOLTAGE, VOLTS