



**VOLTAGE RANGE: 100 - 200V**  
**CURRENT: 3.0 A**

### Features

- High current capability
- High surge current capability
- High reliability
- Low reverse current
- Low forward voltage drop
- Super fast recovery time

### Mechanical Data

- Case : DO-201AD Molded plastic
- Epoxy : UL94V-O rate flame retardant
- Lead : Axial lead solderable per MIL-STD-202, Method 208 guaranteed
- Polarity : Color band denotes cathode end
- Mounting position : Any
- Weight : 1.21 grams

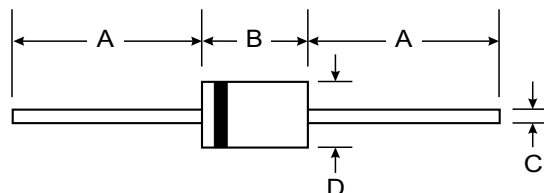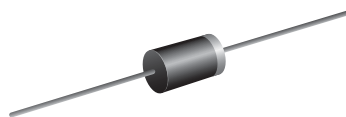

DO-201AD		
Dim	Min	Max
A	25.40	—
B	7.20	9.50
C	1.20	1.30
D	4.80	5.30
All Dimensions in mm		

### Maximum Ratings and Electrical Characteristics T<sub>A</sub> = 25°C unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Characteristic	Symbol	FGP30B	FGP30C	FGP30D	Unit
Maximum Recurrent Peak Reverse Voltage	V <sub>RRM</sub>	100	150	200	Volts
Maximum RMS Voltage	V <sub>RMS</sub>	70	105	140	Volts
Maximum DC Blocking Voltage	V <sub>DC</sub>	100	150	200	Volts
Maximum Average Forward Current 0.375"(9.5mm) Lead Length <small>T<sub>a</sub> = 55 °C</small>	I <sub>F(AV)</sub>	3.0			Amps.
Peak Forward Surge Current, 8.3ms Single half sine wave Superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>	125			Amps.
Maximum Peak Forward Voltage at I <sub>F</sub> = 3.0 A.	V <sub>F</sub>	0.95			Volts
Maximum DC Reverse Current <small>T<sub>a</sub> = 25 °C</small> at Rated DC Blocking Voltage <small>T<sub>a</sub> = 100 °C</small>	I <sub>R</sub>	5			μA
	I <sub>R(H)</sub>	50			μA
Maximum Reverse Recovery Time ( Note 1 )	T <sub>rr</sub>	35			ns
Typical Junction Capacitance ( Note 2 )	C <sub>J</sub>	50			pf
Junction Temperature Range	T <sub>J</sub>	- 65 to + 150			°C
Storage Temperature Range	T <sub>STG</sub>	- 65 to + 150			°C

#### Notes :

- ( 1 ) Reverse Recovery Test Conditions : I<sub>F</sub> = 0.5 A, I<sub>R</sub> = 1.0 A, I<sub>rr</sub> = 0.25 A.
- ( 2 ) Measured at 1.0 MHz and applied reverse voltage of 4.0 V<sub>DC</sub>



## Ratings and Characteristics Curves ( $T_A = 25\text{ }^\circ\text{C}$ unless otherwise specified)

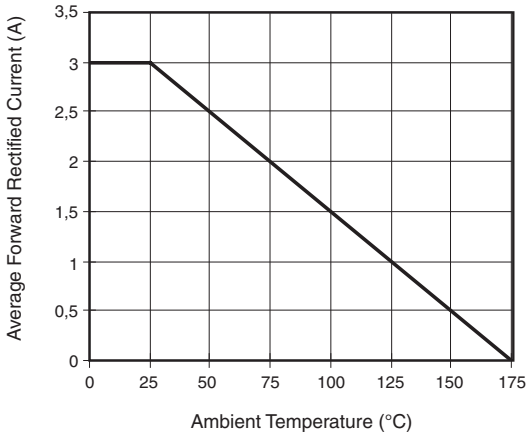


Figure 1. Maximum Forward Current Derating Curve

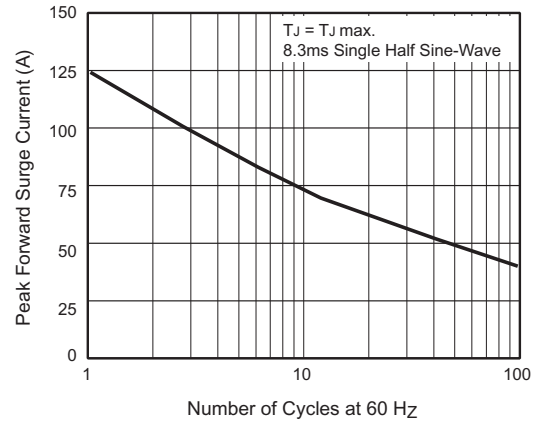


Figure 2. Maximum Non-Repetitive Peak Forward Surge Current

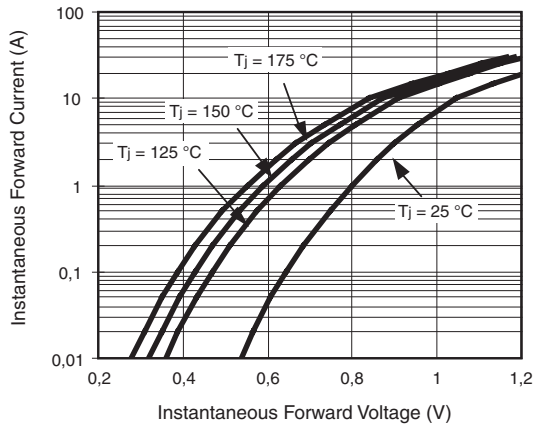


Figure 3. Typical Instantaneous Forward Characteristics

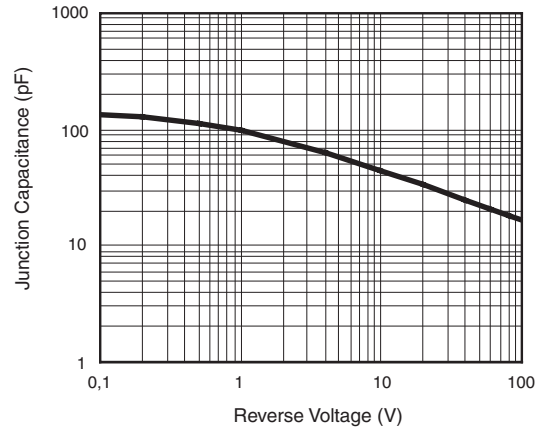


Figure 5. Typical Junction Capacitance

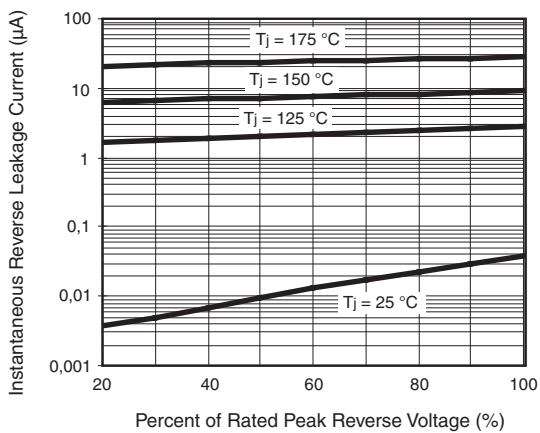


Figure 4. Typical Reverse Leakage Characteristics

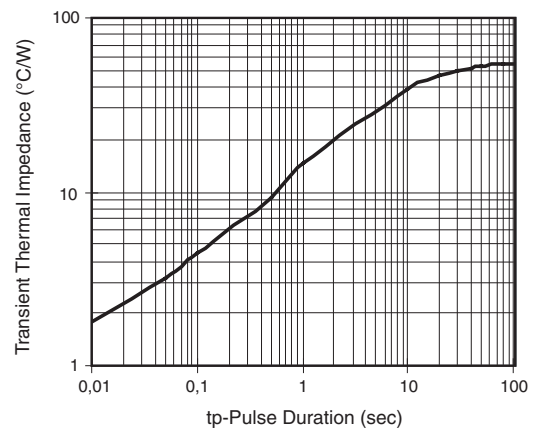


Figure 6. Typical Transient Thermal Impedance