

VOLTAGE RANGE: 100 - 200V



CURRENT: 5.0 A

Features

- Diffused Junction
- Low Forward Voltage Drop
- High Current Capability
- High Reliability
- High Surge Current Capability

Mechanical Data

- Case: DO-201AD Molded Plastic
- Terminals: Plated Leads Solderable per MIL-STD-202, Method 208
- Polarity: Cathode Band
- Weight: 1.2 grams (approx.)
- Mounting Position: Any
- Marking: Type Number

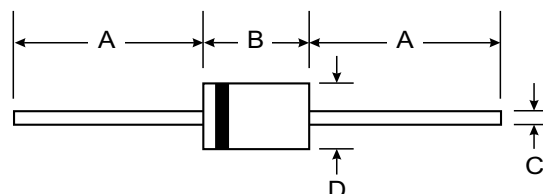

DO-201AD		
Dim	Min	Max
A	25.40	—
B	7.20	9.50
C	1.20	1.30
D	4.80	5.30
All Dimensions in mm		

Maximum Ratings and Electrical Characteristics @T_A=25°C unless otherwise specified

Single Phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Characteristic	Symbol	FGP50B	FGP50C	FGP50D	Unit
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	100	150	200	Volts
Maximum RMS Voltage	V _{RMS}	70	105	140	Volts
Maximum DC Blocking Voltage	V _{DC}	100	150	200	Volts
Maximum Average Forward Current 0.375"(9.5mm) Lead Length T _a = 55 °C	I _{F(AV)}	5.0			Amps
Peak Forward Surge Current, 8.3ms Single half sine wave Superimposed on rated load (JEDEC Method)	I _{FSM}	135			Amps
Maximum Peak Forward Voltage at I _F = 5.0 A.	V _F	0.95			Volts
Maximum DC Reverse Current T _a = 25 °C at Rated DC Blocking Voltage T _a = 100 °C	I _R	5			μA
	I _{R(H)}	50			μA
Maximum Reverse Recovery Time (Note 1)	T _{rr}	35			ns
Typical Junction Capacitance (Note 2)	C _J	50			pf
Junction Temperature Range	T _J	- 65 to + 150			°C
Storage Temperature Range	T _{STG}	- 65 to + 150			°C

Notes :

- (1) Reverse Recovery Test Conditions : I_F = 0.5 A, I_R = 1.0 A, I_{rr} = 0.25 A.
- (2) Measured at 1.0 MHz and applied reverse voltage of 4.0 V_{DC}

RATINGS AND CHARACTERISTICS CURVES FGP50B - FGP50D

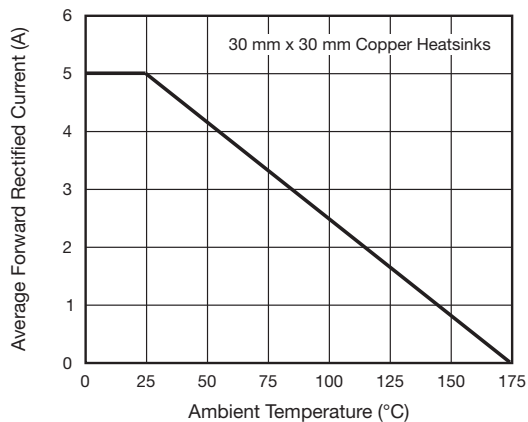


Fig. 1 - Maximum Forward Current Derating Curve

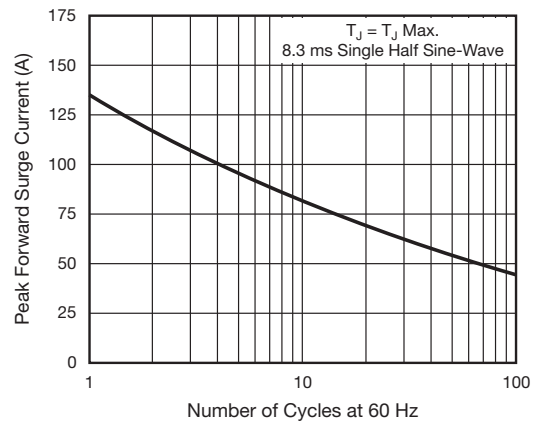


Fig. 2 - Maximum Non-Repetitive Peak Forward Surge Current

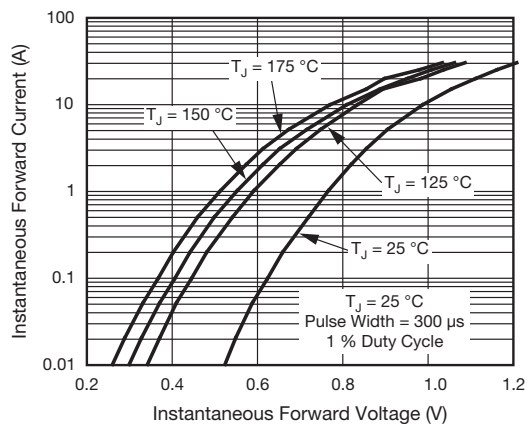


Fig. 3 - Typical Instantaneous Forward Characteristics

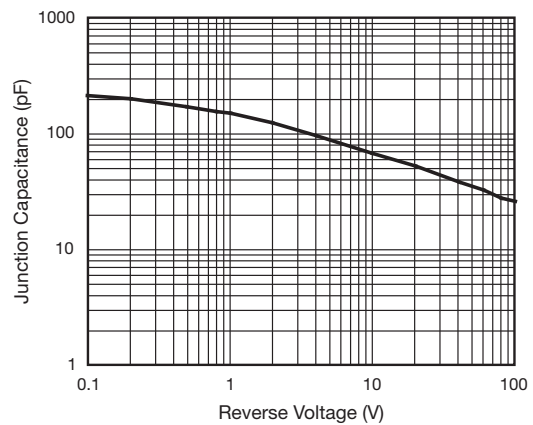


Fig. 5 - Typical Junction Capacitance

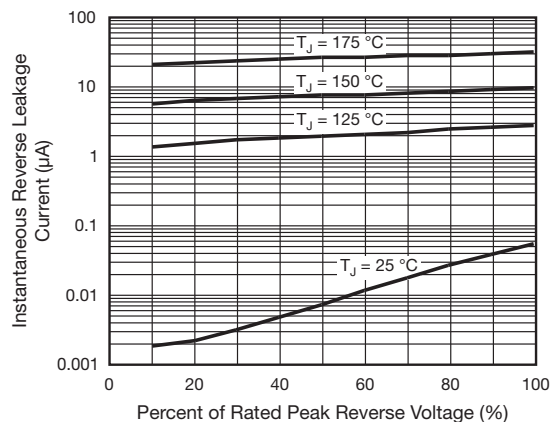


Fig. 4 - Typical Reverse Leakage Characteristics