

VOLTAGE RANGE: 20 - 100V

CURRENT: 5.0 A


Features

- Schottky Barrier Chip
- Ideally Suited for Automatic Assembly
- Low Power Loss, High Efficiency
- For Use in Low Voltage Application
- Guard Ring Die Construction
- Plastic Case Material has UL Flammability Classification Rating 94V-O



Mechanical Data

- Case: SMA/DO-214AC, Molded Plastic
- Terminals: Solder Plated, Solderable per MIL-STD-750, Method 2026
- Polarity: Cathode Band or Cathode Notch
- Marking: Type Number
- Weight: 0.064 grams (approx.)

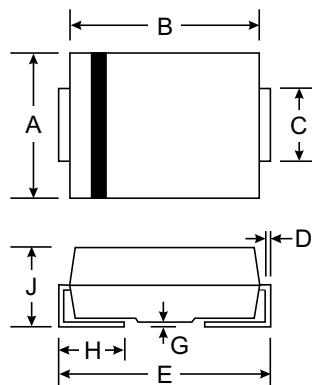

SMA(DO-214AC)		
Dim	Min	Max
A	2.29	2.92
B	4.00	4.60
C	1.27	1.63
D	0.15	0.31
E	4.80	5.59
G	0.10	0.20
H	0.76	1.52
J	2.01	2.62

All Dimensions in mm

Maximum Ratings and Electrical Characteristics $T_A = 25^\circ\text{C}$ unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.


Characteristic	Symbol	SK52A	SK53A	SK54A	SK55A	SK56A	SK58A	SK510A	Unit		
Maximum repetitive peak reverse voltage	V_{RRM}	20	30	40	50	60	80	100	V		
Maximum RMS voltage	V_{RMS}	14	21	28	35	42	56	70	V		
Maximum DC blocking voltage	V_{DC}	20	30	40	50	60	80	100	V		
Maximum average forward rectified current at T_L (see fig.1)	$I_{(AV)}$	5.0						A			
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	150.0						A			
Maximum instantaneous forward voltage at 5.0A	V_F	0.55		0.70		0.85		V			
Maximum DC reverse current $T_A=25^\circ\text{C}$ at rated DC blocking voltage $T_A=100^\circ\text{C}$	I_R	0.5				20					
Typical junction capacitance (NOTE 1)	C_J	200						pF			
Typical thermal resistance (NOTE 2)	$R_{\theta JA}$	50.0						°C/W			
Operating junction temperature range	T_J	-65 to +125			-65 to +150			°C			
Storage temperature range	T_{STG}	-65 to +150						°C			

Note: 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.


2. P.C.B. mounted with 0.2x0.2" (5.0x5.0mm) copper pad areas

RATINGS AND CHARACTERISTIC CURVES SK52A THRU SK510A


AVERAGE FORWARD RECTIFIED CURRENT,
AMPERES

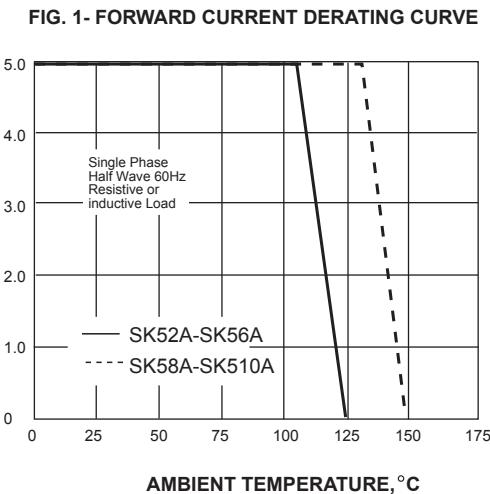


PEAK FORWARD SURGE CURRENT,
AMPERES

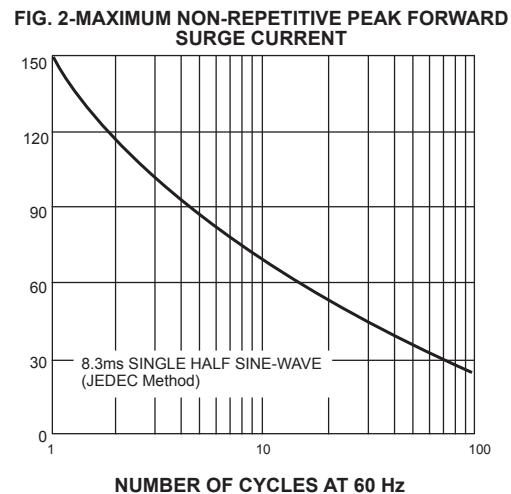


INSTANTANEOUS FORWARD CURRENT, AMPERES

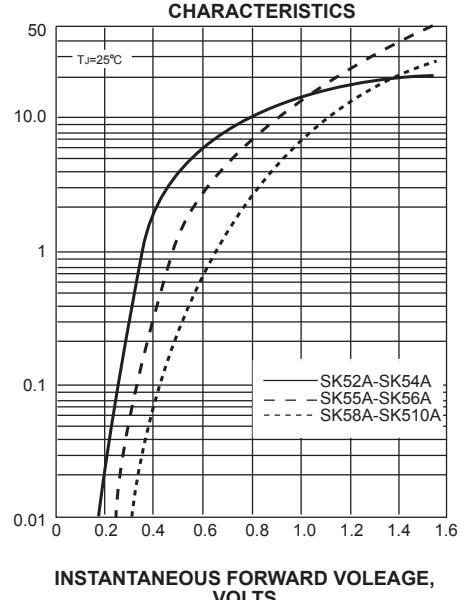

INSTANTANEOUS REVERSE CURRENT,
MILLIAMPERES

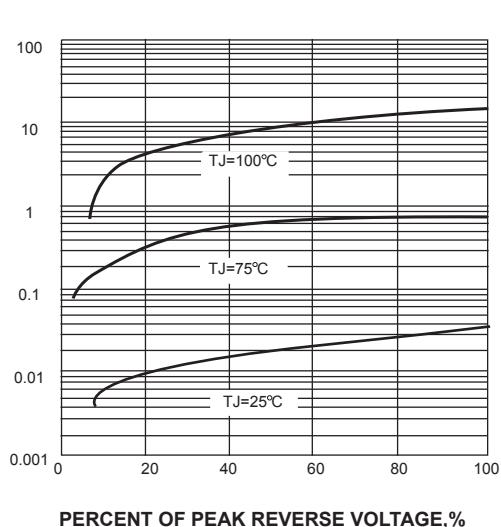

JUNCTION CAPACITANCE, pF

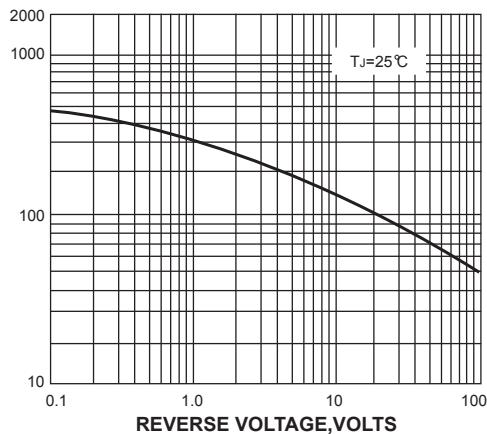

TRANSIENT THERMAL IMPEDANCE,
°C/W

