



SS1020FL - SS10100FL


SURFACE MOUNT SCHOTTKY BARRIER DIODES

VOLTAGE RANGE: 20 - 100V

CURRENT: 1.0 A


Features

- The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- Metal silicon junction,majority carrier conduction
- Low power loss,high efficiency
- High forward surge current capability
- High temperature soldering guaranteed:
250°C/10 seconds,0.375(9.5mm) lead length,
5 lbs. (2.3kg) tension

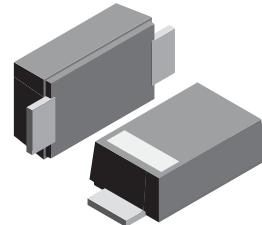

Mechanical Data

- Case: JEDEC SOD-123FL molded plastic body over passivated junction
- Terminals : Plated axial leads,
- solderable per MIL-STD-750, Method 2026
- Polarity : Color band denotes cathode end
- Mounting Position : Any
- Weight:0.0007 ounce, 0.02 grams

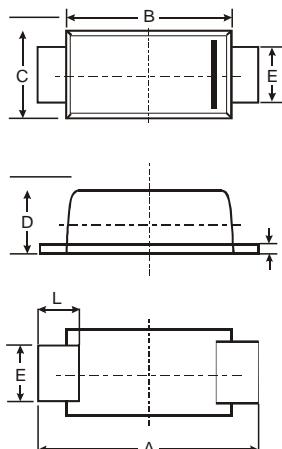

SOD-123FL			
Dim	Min	Max	Typ
A	3.50	3.80	3.65
B	2.60	2.90	2.75
C	1.70	1.90	1.80
D	0.09	1.10	1.00
E	0.08	1.10	0.095
H	0.12	0.20	0.16
L	0.07	0.09	0.08

All Dimensions in mm

Maximum Ratings and Electrical Characteristics

T_A = 25°C unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Characteristic	Symbol	SS1020FL	SS1030FL	SS1040FL	SS1060FL	SS1080FL	SS10100FL	Unit
Maximum recurrent peak reverse voltage	V _{RRM}	20	30	40	60	80	100	V
Maximum RMS voltage	V _{RMS}	14	21	28	42	56	70	V
Maximum DC blocking voltage	V _{DC}	20	30	40	60	80	100	V
Maximum average forward rectified current T _J =90	I _(AV)				1.0			A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load	I _{FSM}				20			A
Maximum instantaneous @I _{FM} =1.0A forward voltage	V _F	0.50	0.55	0.72	0.85			V
Repetitive peak reverse current at rated DC blocking voltage	I _R			0.3				mA
Typical junction capacitance	C _J		30					pF
Operating temperature range	T _j		- 55 --- + 125					
Storage temperature range	T _{STG}		- 55 --- + 150					

NOTE1.Measured at f=1.0MHz,V_R=4.0V

RATINGS AND CHARACTERISTIC CURVES SS1020FL THRU SS10100FL

